



BRING
OUT THE
BEAUTY. BRING
IN THE WOOD.



SILK

For us, details aren't an afterthought. They're the main event. SILK solid interior trim and patterns are beautifully crafted from New Zealand's finest pine to give homes real-life dimension.

SOLID INTERIOR TRIM & PATTERNS



MATERIAL SPECIFICATIONS:

- Interior use only
- Solid CLEAR Radiata Pine
- Kiln dried to exacting standards for stability
- Available 4/4 and 5/4



COATING SPECIFICATIONS:

- Finished with alkyd primer and latex topcoat
- Sanded and buffed between coats
- Low V.O.C. interior friendly
- Field finish with latex top coats
- 15-year primer warranty



OFTEN IMITATED.
NEVER DUPLICATED.


AVAILABLE S4S LENGTHS

1x4 - 8', 12', 14', 16'
1x5 - 8', 12', 14', 16'
1x6 - 8', 12', 16'
1x8 - 8', 12', 16'
1x10 - 12', 16'
1x12 - 12', 16'
5/4x4 - 12', 16'
5/4x5 - 12', 16'
5/4x6 - 12', 16'

PATTERN PROFILES



NICKEL GAP SHIPLAP

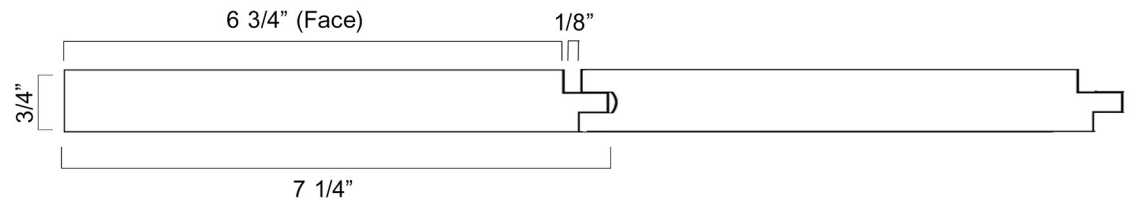

AVAILABLE PATTERN LENGTHS

1x8 Nickel Gap CM - 12', 16'
1x8 Nickel Gap SL - 12', 16'

NICKEL GAP CENTER MATCH

INSTALLATION TIPS:

- SILK is kiln dried to 10-12% MC, and can pick up ambient moisture while in storage.
- Proper acclimation is key. For best results SILK should be placed in the room(s) 7-10 days prior to installation.
- We recommend using 3 or more face nails when fastening 1x8, 1x10 and 1x12 SILK.
- 1x8 Nickel Gap can be blind nailed, however, for optimum stability we recommend face nailing.



TIMBERTRADING.COM | (800) 331-7319